

## Opto-cable set

### optical digital cable for audio data including 3.5 mm adapter

The optical digital audio connection with a high light output and data transfer rate. The triple-coated connector engages easily, is secure and reliable. The result is a clear surround sound and an audio experience just the way it should be. Thanks to the included 3.5 mm adapter, it is especially handy when used with a wide range of mobile devices, notebooks and game consoles.

- Fiber-optic cable with extremely high light output
- precisely fitting PVC / ABS connector
- 3.5 mm adapter included in the scope of delivery

#### Specifications

##### Connections

Plug material:	triple-coated PVC / ABS
Port 1, type:	TOSLINK connector / 3.5 mm connector
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	TOSLINK connector
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

##### cable


Type:	Round cable
Length (m):	0.5   1   2   3   5   7.5   10   15   20
Inner conductor material:	POF (Polymer Optical Fiber)
Inner conductor diameter (mm):	1 x 1.0
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	6.0
Kink protection:	on both sides

##### Signal transmission

Transmission modes:	digital audio signals
supported audio standards:	Dolby Digital/Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD-Audio, SA-CD

##### General

Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10

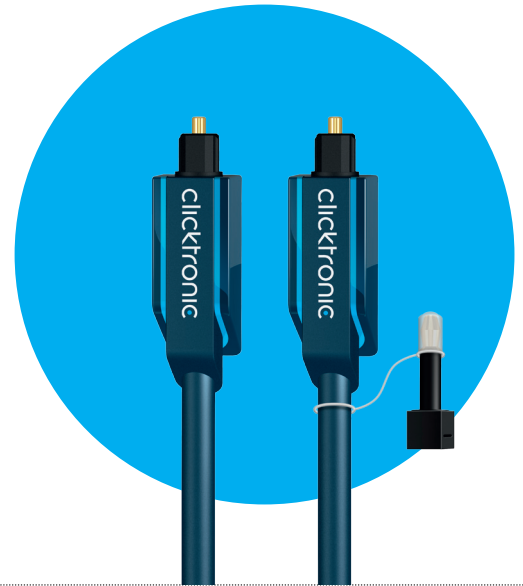


TOSLINK connector / 3.5 mm connector



TOSLINK connector



##### Cross section

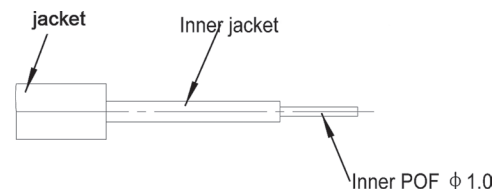










##### Wiring diagram



# Opto-cable set

optical digital cable for audio data including 3.5 mm adapter

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70365	0.50	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 703652
70366	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 703669
70368	2.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 703683
70369	3.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 703690
70370	5.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 703706
70371	7.50	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 703713
70372	10.00	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 703720
70374	15.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 703744
70375	20.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 703751

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany